



SHEERWEAVE | 4550 5%




P10 GRANITE



P65 LINEN



V45 COAL

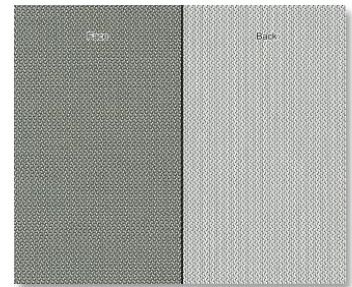

V47 CHESTNUT

SPECIFICATION

WIDTHS 63" and 98"

ROLL LENGTH 30 Linear Yards

FABRIC WEIGHT 13.00 oz/yd²

FABRIC THICKNESS 0.025 in.

OPENNESS ~5%

UV BLOCKAGE ~95%

COMPOSITION 17% Polyester, 83% Vinyl on Polyester

WARRANTY 5-Years Interior, 10- Years Exterior

BACTERIAL AND RESISTANCE

ACOUSTICAL PERFORMANCE ENVIRONMENTAL BENEFITS

FIRE CLASSIFICATION

ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3, ASTM D 3273

NRC 0.15 / SAA 0.18

Certified to GREENGUARD and GREENGUARD Gold

California U.S. Title 19 (small scale), NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), IBC Section 803.1.1 (Class A Rating), BS 5867 Part 2 Type B Performance, NFPA 701 TM#2 (large scale), CAN/ULC-S 109 (large and small scale)



Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.