


SHEERWEAVE | 4901 1%

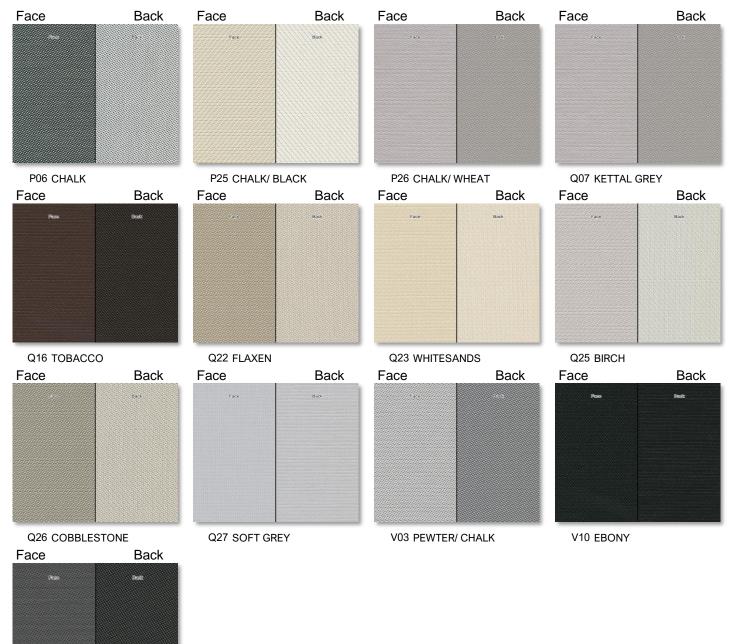

V28 SLATE

Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.



WIDTHS 63" and 98"

ROLL LENGTH 30 Linear Yards

FABRIC WEIGHT 15.85 oz/yd²

FABRIC THICKNESS 0.028 in.

OPENNESS ~1%

UV BLOCKAGE ~99% COMPOSITION 17% Polyester, 83% Vinyl on Polyester WARRANTY 5-Years Exterior, 10-Years Interior ENVIRONMENTAL BENEFITS BACTERIAL AND RESISTANCE ACOUSTICAL PERFORMANCE FIRE CLASSIFICATION

Certified to GREENGUARD and GREENGUARD Gold ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3, ASTM D 3273

NRC:0.60, SAA: 0.59

California U.S. Title 19 (small scale), NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), IBC Section 803.1.1 (Class A Rating), BS 5867 Part 2 Type B Performance, NFPA 701 TM#2 (large scale), CAN/ ULC-S 109 (large and small scale), CAN/CGSB2-4. 162-M80



Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.