

**SHEERWEAVE | 7750 R LIGHTFILTERING**




TB1 CRYSTAL



TB2 SAND



TB4 CHALK

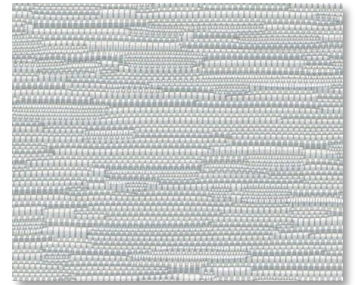

TB3 CONCRETE



TB5 GRAPHITE



TB6 PEWTER



TB7 ONYX

**SPECIFICATION**

**WIDTHS** 118"

**ROLL LENGTH** 22 Linear Yards

**FABRIC WEIGHT** 8.80 oz/yd<sup>2</sup>

**FABRIC THICKNESS** 0.023 in.

**OPENNESS** Light-Filtering

**COMPOSITION** 100% Polyester with Acrylic Coating

**WARRANTY** 5- Years Interior

**BACTERIAL AND RESISTANCE ENVIRONMENTAL BENEFITS**  
**FIRE CLASSIFICATION**

ASTM G21, AATCC 174-1998 Part II and III

Certified to GREENGUARD

Style 7750R: California Technical Bulletin 117,  
 NFPA 101 (Class A Rating), IBC Section 803.1.1  
 (Class A Rating)



**Care & Handling**

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.